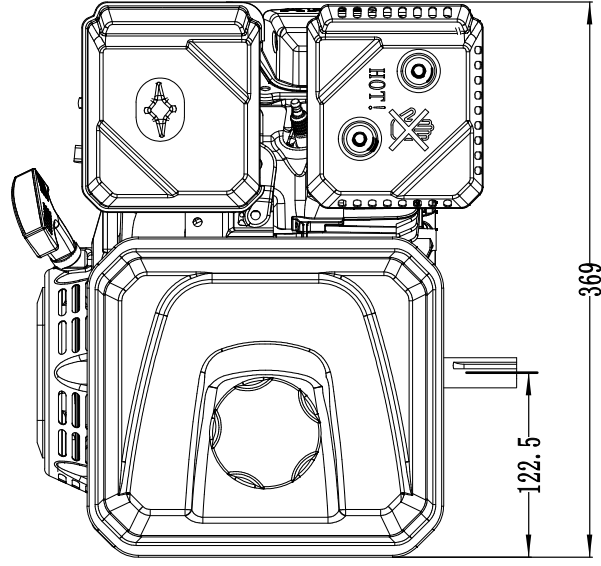
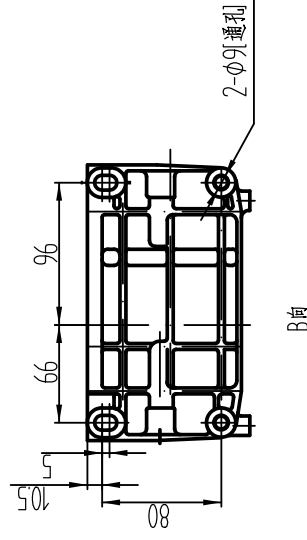
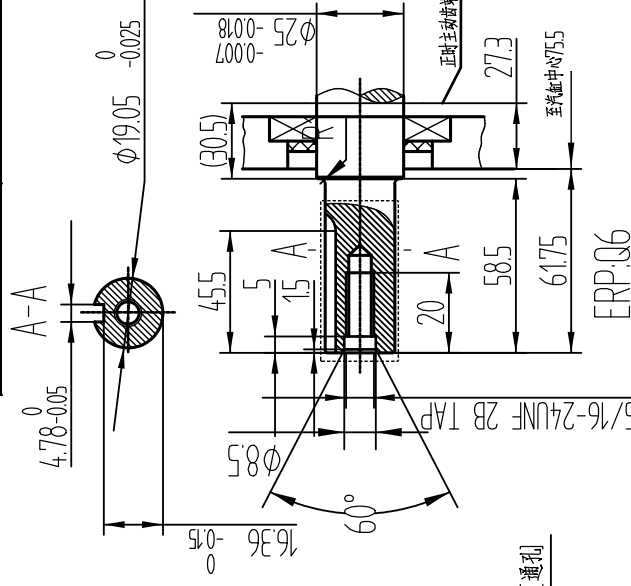
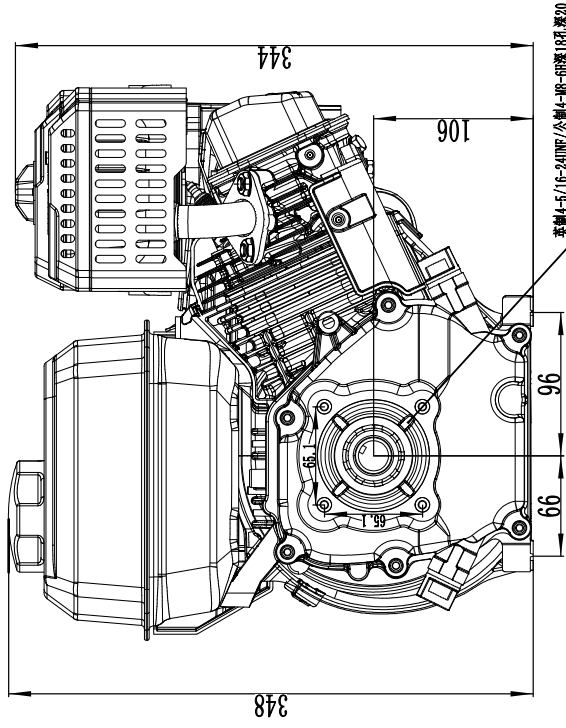
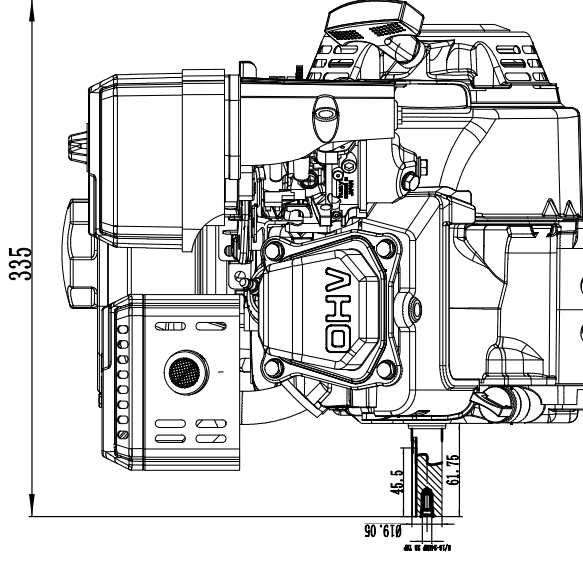


170F-2T SPECIFICATION

MODEL	170F-2T
ENGINE TYPE	SINGLE CYLINDER 4 STROKE
OUTPUT SHAPE TYPE	Q TYPE (ERP:Q6)
CRANK CASE COVER TYPE	BRITISH SYSTEM TYPE (G/16-24UNF)
EMISSION	
BORE×STROKE mm	70×58mm
DISPLACEMENT (ml)	223ml
COMPRESSION RATIO	9.5: 1
NO LOAD SPEED (rpm)	3850±30
MAX OUTPUT (Kw/rpm)	4.5KW/3600rpm
RATED OUTPUT (Kw/rpm)	4.5KW/3600rpm
MAX TORQUE (N.m/rpm)	13.5 N.m/2500rpm
IDBL SPEED (r/min)	1600±150
START TYPE	RECOIL START
IGNITION TYPE	TCI
FILTER ELEMENT	foam and paper filter
FUEL TANK VOLUME (L)	4.0L
FUEL CONSUMPTION (g/kw.h)	374g/Kw.h
ENGINE OIL VOLUME (L)	0.6L
NET WEIGHT (kg)	16 kg
PACKAGE DIMENSION (mm)	415×380×380 (mm)

[illegible]

	描 图
	描 校
	旧底图登记号
	底图登记号